

RMO-G series

Micro Ohmmeters

- Lightweight – from 8 to 11,5 kg /17.6 lbs to 25.4 lbs
- Powerful – test current up to 800 A DC
- Measuring range: 0,1 $\mu\Omega$ – 999,9 m Ω (up to 6 Ω)
- Best resolution: 0,01 $\mu\Omega$ (with built-in HP module)
- Typical accuracy: \pm (0,1 % rdg + 0,1 % FS)
- Remote Control Unit (optional)
- Both Sides Grounded Unit (optional)
- A built-in High Precision module (optional)
- *SINGLE / CONTIN / BSG / DTRtest* modes



Description

RMO-G series of Micro Ohmmeters (hereafter referred to as “RMO-G”) contain 7 models: **RMO100G, RMO200G, RMO300G, RMO400G, RMO500G, RMO600G & RMO800G.**

All RMO-G models are based on a state of the art technology, using the most advanced switch mode technique available today. The main difference between these models is the maximum test current that can be generated (100 A for RMO100G, 200 A for RMO200G, ..., up to 800 A for RMO800G model).

RMO-G generates a true DC ripple-free current with automatically regulated test ramps. During a test the RMO-G ramps with increasing current before measuring and decreasing current after the measurement. This decrease influence of magnetic transients on measurements.

Maximum load capacity at 100 A is continuous for all RMO-G models at 25°C (77°F) ambient temperature.

The RMO-G instrument can store internally up to 500 measurements (resistance, voltage drop and test current values). All measurements are time and date stamped.


Communication between the RMO-G and a PC is through an USB (as standard) or an RS232 cable (as an option). Using the DV-Win software a test can be performed from a PC. The results can be obtained directly on the PC or downloaded from the RMO-G device. DV-Win contains test reports wizard used for generating fully customized test reports.

The RMO-G instrument has four separate test modes:

- SINGLE mode
- CONTIN mode
- BSG mode (*Both Sides Grounded*)
- DTRtest mode (*Dead Tank Resistance*)

Single Test

The RMO-G instrument generates a filtered (true ripple-free) DC current and output it in an automatically regulated current ramp. By sloping the current up and down, magnetic transients are virtually eliminated. Below is an example of single test ramp for the 100 A current.

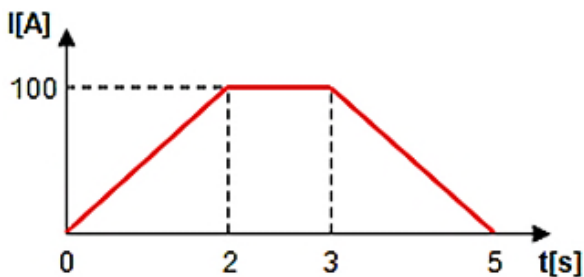

Continuous Test

RMO-G can generate DC current continuously in predefined test durations, as presented in the table below.

Test current (A)	Maximum test duration time
5, 10, 20, 50, 100	Continuous
200	150 s
300	90 s
400	50 s
500	30 s
600	20 s
800	**5 s

* at 25°C (77°F) ambient temperature.

**in standard version CONTIN mode is available up to 600 A, but it can be available for 800 A (5 s) as per request

To prevent overheating, certain duty cycles apply depending on the test current being used.

BSG test

Grounding circuit breakers from both sides provides increased safety for testing personnel comparing with only one side grounding method.

This test mode is specially designed for **Both Sides Grounded** testing. A special current clamp meter supplied from the instrument is used for measuring the current through the groundings. The test setup is very simple (same as for the SINGLE test) and all calculations are made automatically by the device internal algorithm.

DTRtest

Presence of current transformers (CT) on the dead tank circuit breakers may introduce errors during contact resistance measurement due to CT magnetizing process. For this reason, it is necessary to saturate a CT prior to measurement.

DTRtest menu is specially designed for resistance measurement of the dead tank circuit breakers. All calculations for detecting the saturated condition of CTs are done by internal algorithm. Accordingly, the process of measurement parameters setting and testing in this mode is very simple and does not differ much from live tank circuit breaker testing (in SINGLE / CONTIN test modes).

High – Precision module (optional)

The high-precision module is newly developed optional built-in addition to our RMO-G micro-ohmmeters. It provides an increased precision and offers a highly accurate contact resistance measurement: $\pm (0,1 \% \text{ rdg} + 0,1 \% \text{ FS})$ accuracy at range from 0,01 $\mu\Omega$ to 99,99 $\mu\Omega$, with 0,01 $\mu\Omega$ resolution.

RMO-G devices with the built-in High Precision Module may be used for applications on very small resistance measurements of non-inductive test objects. This requirement is usually met at resistance inspections of generator circuit breakers, welding joints, GIS testing, etc.


Application

Typical application is measuring resistance of non-inductive test objects:


- High- and medium- voltage circuit breakers (live and dead tank)
- High- and medium- voltage disconnecting switches
- Gas Isolated Switchgears (GIS)
- High-current bus bar joints
- Cable splices
- Welding joints
- Fuses

Connecting the Test Object to RMO-G


The connection diagram of the RMO-G devices corresponds to the Kelvin's (four point) measurement principle. The measuring cables from the "Voltage Sense" sockets are attached as close as possible to Rx, and in between the current feeding cables. That way, a resistance of both cables and clamps is almost completely excluded from the resistance measurement.

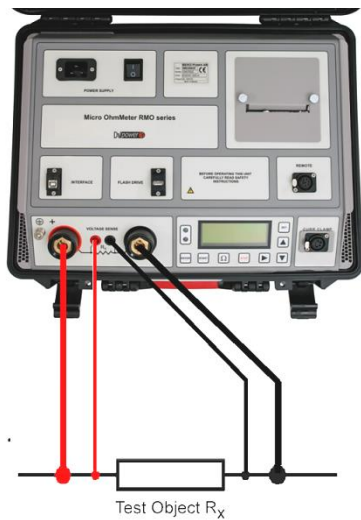

The connecting diagrams for the live tank and dead tank circuit breakers are presented in the following two figures:

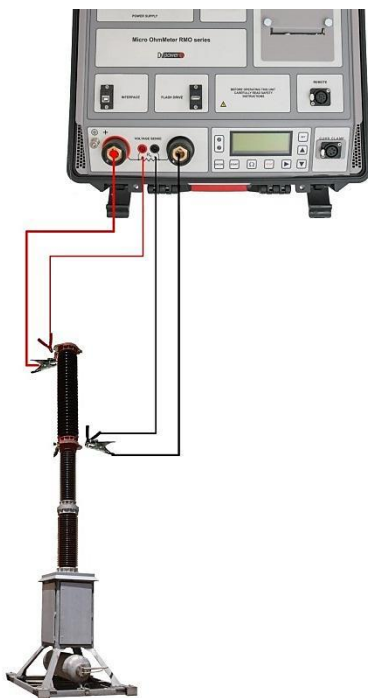


RMO-G cable connection on live tank circuit breaker

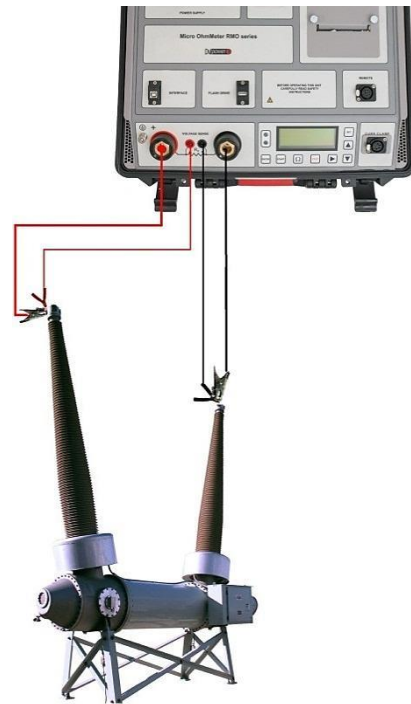

RMO-G cable connection on dead tank circuit breaker

Remote Control Unit


The RMO Remote Control Unit is an optional control unit that is used to start and stop the tests from a remote location, away from the actual RMO-G.

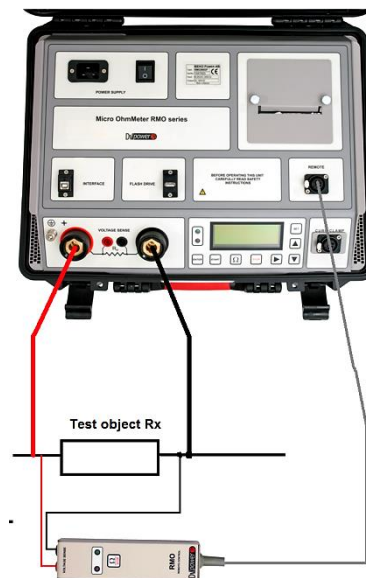

Provided that, for a series of tests, the same test current is fed through the test object, multiple measurements can be carried out with the RMO Remote Control Unit.

Connecting RMO-G to a Both Sides Grounded Circuit Breaker

Using RMO-G with both sides grounded option it is possible to make safer measurement of breakers with both terminals of the breaker grounded.

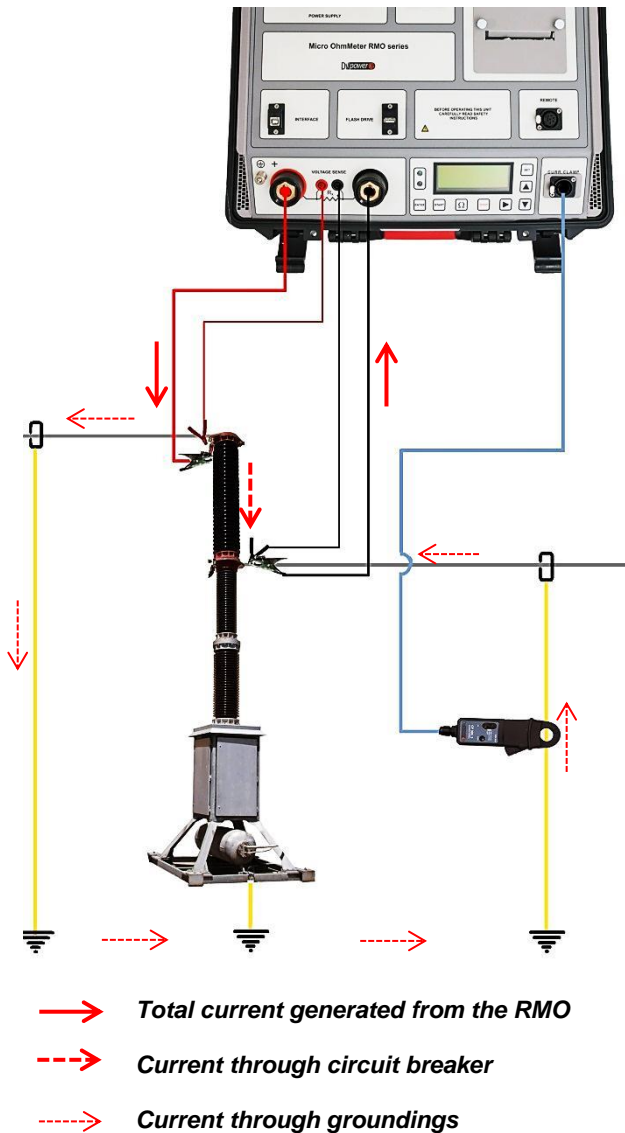

Using the RMO-G with a current clamp-meter is an additional safety feature. Measurement of a circuit breaker contact resistance is done with both sides of the breaker grounded.

The RMO-G device will measure the current through the ground circuit connection and add this value to the selected test current value in order to provide the selected test current through the test object.

Benefits and features

The main benefits and features of RMO-G devices are listed below:

- Very high output power (output voltage multiplied with output current) enables two main advantages:
 1. Wide resistance measurement range even when very high currents are used.
 2. Use of thinner/longer test cables, depending of the customer requirement.
e.g. RMO100G can use 20 m current cables with cross-section of only 16 mm² for testing circuit breakers with 100 A test current.
- The output current is filtered and has a ripple of less than 1 %.
- Maximum load capacity at 100 A is continuous for all RMO-G models at 25°C (77°F) ambient temperature.
- The instrument has a very high typical accuracy ± (0,1 % rdg + 0,1 % FS).
- The best resolution of RMO-G is 0,01 μΩ at 99,99 μΩ range (in case of built-in High Precision module).

Several advanced features are available as standard/optional accessories:

- Rmax feature – pass/fail criteria
- Built-in thermal printer (*optional*)
- USB or RS232 communication port
- Bluetooth communication (*optional*)
- DTRtest mode – a special mode for Dead Tank circuit breakers testing
- A built-in High Precision module (available as option) – provides an increased precision and offers a highly accurate contact resistance measurement in the range from 1 μΩ to 30 μΩ, with 0,01 μΩ resolution.

DV-Win software

DV-Win software provides acquisition and analysis of the test results, as well as control of all the RMO-G functions from a PC. The DV-Win also provides several advanced features as a supplement to multiple functions of RMO-G devices. Testing in Continuous mode is upgraded with a sample time feature which allows user to record test results in specific time intervals set in seconds.

After performed measurements results can be saved in a various formats and test report can be generated and saved or printed. Result can also be downloaded from the device to the PC by use of several different search filters.

For the RMO-G form of DV-Win software there is Help menu available, with detailed instructions and explanations of all functions and features.

DV-Win Main Features

- Full control of the device in test
- Test reports available in several formats
- Several filters for results download to PC
- Sampling time feature for CONTIN mode

The screenshot displays the DV-Win software interface. The top window shows a dashboard with a 'Welcome back!' message and several action buttons: 'Start new test', 'Analyze your results', 'Manage test plans', 'Create reports', 'Adjust settings', and 'About?'. Below this, a 'Test report' window is open, showing a table of test results. The table has columns for 'Time', 'Status', 'Set Total', 'Set Count', 'Set Size', 'Set Weight', 'Set Weight', 'Set Size', 'Set Weight', and 'Set Size'. The data rows show various test parameters and results.

Time	Status	Set Total	Set Count	Set Size	Set Weight	Set Weight	Set Size	Set Weight	Set Size
1	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
2	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
3	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
4	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
5	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
6	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
7	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
8	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
9	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
10	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
11	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
12	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
13	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
14	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
15	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
16	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
17	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
18	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
19	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100
20	2020/9/18 07:00 PM	100	100	100	100	100	100	100	100

Technical data

Mains power supply

- Connection according to IEC/EN60320-1; C320
- Mains supply: 90 V – 264 V AC
- Frequency: 50 / 60 Hz
- Power consumption:

Model	@ 230 V AC	@ 115 V AC
RMO100G	1190 VA	1130 VA
RMO200G	1815 VA	1810 VA
RMO300G	2400 VA	2115 VA
RMO400G	3570 VA	2710 VA
RMO500G	3970 VA	3920 VA
RMO600G	4720 VA	4145 VA
RMO800G	5010 VA	3510 VA

- Fuse: *type F*
- | | |
|-------------------|--------------|
| RMO100G & RMO200G | 12 A / 230 V |
| RMO300G & RMO400G | 15 A / 230 V |
| RMO500G & RMO600G | 20 A / 250 V |
| RMO800G | 20 A / 250 V |

Output data

- Test current ranges (from 0 to I_{max}) and maximum load capacity at 25°C (77°F) ambient temperature:

Model	Current	Max. load capacity
RMO100G	100 A	Continuous
RMO200G	200 A	150 s
RMO300G	300 A	90 s
RMO400G	400 A	50 s
RMO500G	500 A	30 s
RMO600G	600 A	20 s
RMO800G	800 A	300 ms

- Full Load Voltages at maximum current

Model	@ 230 V AC	@ 115 V AC
RMO100G	7,15 V	6,80 V
RMO200G	6,80 V	5,90 V
RMO300G	7,20 V	5,70 V
RMO400G	6,70 V	4,40 V
RMO500G	5,95 V	5,10 V
RMO600G	5,90 V	3,80 V
RMO800G	4,70 V	2,85 V

Measurement

- Resistance range:
0,1 μΩ – 999,9 mΩ* for RMO100 – 600G,
0 – 499,9 mΩ for RMO800G
**Expandable up to 6 Ω*
- Resolution:
0 – 999,9 μΩ 0,1 μΩ
1,000 mΩ – 9,999 mΩ 1 μΩ
10,00 mΩ – 99,99 mΩ 10 μΩ
100,0 mΩ – 999,9 mΩ 0,1 mΩ
Resolution on optional ranges:
(0 – 99.99 μΩ 0,01 μΩ)*
(1,000 Ω – 6,000 Ω 1 mΩ)**
**With built-in High-precision module*
***Expanded range up to 6 Ω*
- Typical accuracy ± (0,1 % rdg + 0,1 % FS)

Display

- LCD screen 20 characters by 4 lines;
- LCD display with backlight, visible in bright sunlight.

Interface

- RMO-G is equipped with an USB port
- optional: RS232
- optional: Bluetooth communication interface

Test Result Storage

- RMO-G can store up to 500 measurements

Printer (optional)

- Thermal printer
- Paper width 58 mm / 2.3 in

Dimensions and weight

Model	Weight kg / lbs	Dimensions (W x H x D) mm / in
RMO100G	8 kg / 17.6 lbs	405 x 165 x 330 mm 7.8 x 10 x 15 in
RMO200G	8 kg / 17.6 lbs	
RMO300G	8 kg / 17.6 lbs	480 x 190 x 385 mm 18.9 x 7.48 x 15.16 in
RMO400G	9 kg / 20 lbs	
RMO500G	9 kg / 20 lbs	<i>*RMO100G/200G/300G/400G/500G in version without built-in thermal printer</i>
RMO600G	11 kg / 24.3 lbs	
RMO800G	11,5 kg / 25.4 lbs	

Environmental protection

- Ingress protection rating: IP67 *with closed lid

Environmental conditions

- Operating temperature:
-20 °C - +55 °C / -4 °F - +131 °F
- Storage & transportation:
-40 °C - +70 °C / -40 °F - +158 °F
- Relative humidity 5% - 95%, non-condensing
- Altitude: up to 2000 m

Applicable Standards

- Installation/overvoltage: category II
- Pollution: degree 2
- Low Voltage Directive: 2014/35/EU (CE conform), EN 61010-1
- EMC Directive 2014/30/EU (CE conform) (Former 2004/108/EC)
Applicable standard: IEC/EN 61326-1
- CAN/CSA-C22.2 No.61010-1, 2nd edition, including Amendment 1

Warranty

- 3 Years + additional 1 (one) year upon registration on DV Power official website (www.dv-power.com).

All specifications herein are valid at ambient temperature of + 25 °C and standard accessories. Specifications are subject to change without notice.

Accessories



Current cables



Extension current cables



Voltage sense cables



Current clamp 30/300A power supplied from the instrument



Test shunt



Plastic transport case & Cable bag



* Besides battery clamps, current cables are also available with C clamps or with alligator clamps (as option)

** Besides isolated alligator (A2) clamps, sense cables are also available with semi-isolated alligator (A1) or with TTA clamps (as option)

Recommended cross-sections for RMO-G models:

CROSS SECTION/ LENGHT	16 mm ²	25 mm ²	35 mm ²	50 mm ²	70 mm ²	95 mm ²
5 m	RMO100G	RMO200G	RMO300G & RMO400G	RMO500G & RMO600G	-	RMO800G
10 m	RMO100G	RMO200G	RMO300G & RMO400G	RMO500G & RMO600G	-	RMO800G
15 m	-	RMO100G	RMO200G	RMO300G & RMO400G	RMO500G & RMO600G	-

Order info

Instrument with included accessories	Article No
Micro Ohmmeter RMO100G	RMO100G-N-03
Micro Ohmmeter RMO200G	RMO200G-N-03
Micro Ohmmeter RMO300G	RMO200G-N-03
Micro Ohmmeter RMO400G	RMO200G-N-03
Micro Ohmmeter RMO500G	RMO200G-N-03
Micro Ohmmeter RMO600G	RMO200G-N-03
Micro Ohmmeter RMO800G	RMO800G-N-03
<ul style="list-style-type: none"> - DV-Win PC software - Mains power cable - Ground (PE) cable - USB cable - Plastic transport case <ul style="list-style-type: none"> • Small size for RMO100G/200G/300G/400G/500G without built-in thermal printer • Medium size for RMO600G/RMO800G and all RMO-G with built-in thermal printer 	
Standard accessories	Article No
Current cables 2 x 5 m, *XX mm ² with battery clamps	C2-05-XXYMBY**
Sense cables 2 x 5 m with alligator clamps	S2-05-02BPA2
Cable bag	CABLE-BAG-00
Optional accessories	Article No
Plastic transport case – small size <i>*RMO100G/200G/300G/400G/500G without built-in thermal printer</i>	PLCAS-P00-01
Plastic transport case – medium size <i>*RMO600G/RMO800G and all RMO-G with built-in thermal printer</i>	PLCAS-P00-02
Cable plastic case – medium size	CABLE-CAS-02
Test shunt 100 μΩ (600 A/60 mV)	SHUNT-600-MK
Current cables 2 x 10 m, *XX mm ² with battery clamps	C2-10-XXYMBY**
Current cables 2 x 15 m, *XX mm ² with battery clamps	C2-15-XXYMBY**
Current extension cable 2 x 10 m, *XX mm ²	E2-10-XXYMYF
Current cables 2 x 10 m 70 mm ² with battery clamps	C2-10-70VMB3
Current cables 2 x 10 m 70 mm ² with alligator clamps	C2-10-70VMA4
Current cables 2 x 10 m 70 mm ² with C clamps	C2-10-70VMC0
Sense cables, extension 2 x 10 m	E2-10-02BPBP
Sense cables 2 x 10 m with alligator clamps	S2-10-02BPA2
Sense cables 2 x 15 m with alligator clamps	S2-15-02BPA2
Thermal printer 58 mm (built-in)	PRINT-058-01
Thermal paper roll 58 mm (2.3 in)	PRINT-058-RO
High Precision Module (built-in)	RMO-HPMM-DG0
Remote control unit	RMORCU-09-00
Remote control test probes (one with trig button)	RMO-RCTP-TB0
Current clamp 30/300 A power supplied from the instrument with extension 5 m (Both Sides Grounded Unit)	CACL-0300-06

*XX - Cross-section of current cables varies, depending of the output power of the model.

**YMBY – For RMO100G and RMO200G without built-in thermal printer: YMBY=LMB1;

For RMO100G and RMO200G with built-in thermal printer and for other models: YMBY=VMB3

e.g.

For RMO200G without built-in thermal printer, the article number for current cables 10 m/25 mm² cross-section is C2-10-25LMB1

For RMO600G, the article number for current cables 5m/50 mm² is C2-05-50VMB3 and for 5 m/35 mm² AN is C2-05-35VMB3.

IBEKO Power AB

Lejonstigen 9

181 32 Lidingö, Sweden

Contact

Phone: +46 70 0925 000

E-mail: sales@dv-power.com